



CONFERENCE
LECTERNS

NEONYX

NEONYX STANDARD



Plaque personnalisable et aimantée

The NEONYX is a stylish and robust lectern, available in different configurations. Besides the standard version, it can accommodate a 19" touch screen as well as being adjustable in terms of height. It incorporates all the essential functionalities for your events, receptions, seminars or conferences.

● Designed & Manufactured in France

CHARACTERISTICS

- Lectern in white satin and mat black plexiglass
- Internal Column plexiglass allowing the integration of cables
- With two microphone base locations
- Band with magnetic plate for logo inlay
- Discrete shelf next to the speaker (w x d x h): 260 x 90 x 6 mm
- Plate dimensions for logo (w x h): 599 x 139 mm
- Top of lectern dimensions (w x h): 650 x 521 mm
- Total dimensions (w x d x h): 650 x 521 x 1227 mm
- Weight: 25 kg
- Delivered assembled

REFERENCE NEONYX STANDARD

➤ NEONYX

NEONYX TOUCH



Connection panel

CHARACTERISTICS

- Lectern in white satin and mat black plexiglass with a 19" EloTouch touch screen integrated
- Internal Column plexiglass allowing the integration of cables
- With two microphone base locations
- Band with magnetic plate for logo inlay
- Connection panel including :
 - Power supply and
 - Ethernet
 - DVI "in"
 - "on-off" light switch
 - VGA "in"
 - USB
- Discrete shelf next to the speaker (w x d x h): 260 x 90 x 6 mm
- Plate dimensions for logo (w x h): 599 x 139 mm
- Top of lectern dimensions (w x h): 650 x 521 mm
- Total dimensions (w x d x h): 650 x 521 x 1227 mm
- Weight: 28 kg
- Delivered assembled

REFERENCE NEONYX TOUCH

➤ NEONYX_TOUCH

➤ AXEOS - Siège social
Route des Dignes
14123 Fleury-sur-Orne
France
Tél. : +33 (0)2 31 28 59 37

➤ Axeos - London Office
Phoenix Yard - 65 King's Cross Road
London, WC1X 9LW
United Kingdom
Tél. : +44 (0) 207 239 4965

www.axeos.net






CONFERENCE
LECTERNS

NEONYX

NEONYX LIFT

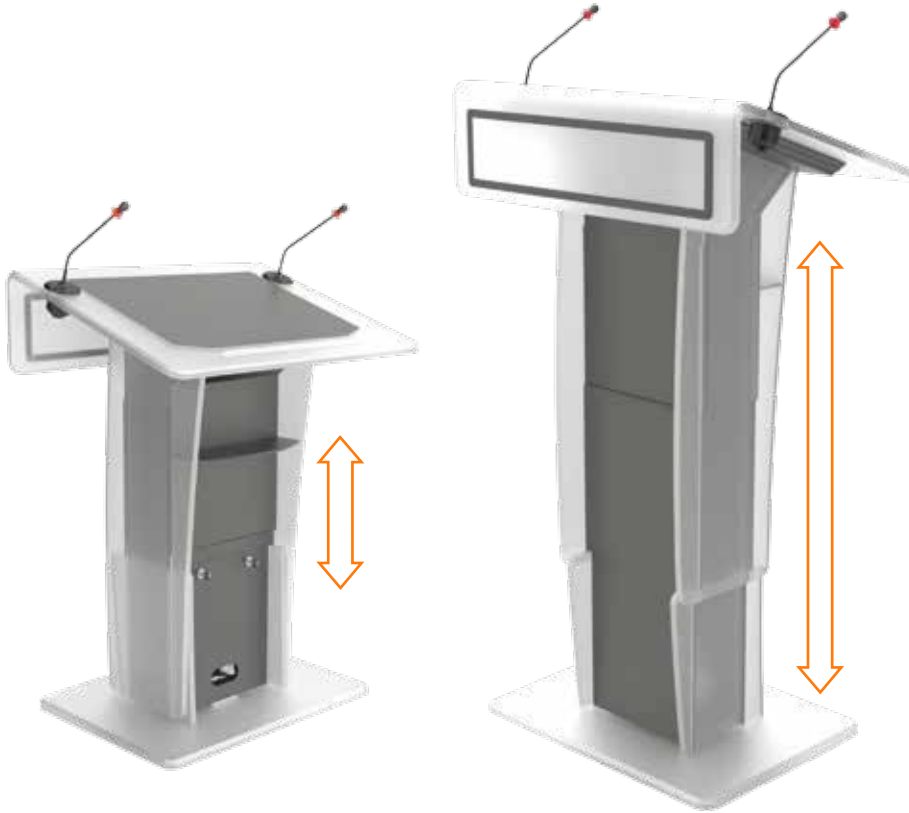


CHARACTERISTICS

- Lectern in white satin and mat black plexiglass
- Internal column plexiglass allowing the integration of cables
- With two microphone base locations
- Electric adjustable height with control on lectern or remote control (optional) from 932 mm to 1227 mm
- IEC cable included
- Band with magnetic plate for logo inlay
- Discrete shelf next to the speaker (w x d x h): 260 x 90 x 6 mm
- Plate dimensions for logo (w x h): 599 x 139 mm
- Top of lectern dimensions (w x h): 650 x 521 mm
- Total dimensions (w x d x h): 650 x 521 x 1227 mm
- Weight: 37 kg
- Delivered assembled

REFERENCE NEONYX LIFT

➤ NEONYX_LIFT

NEONYX TOUCH LIFT

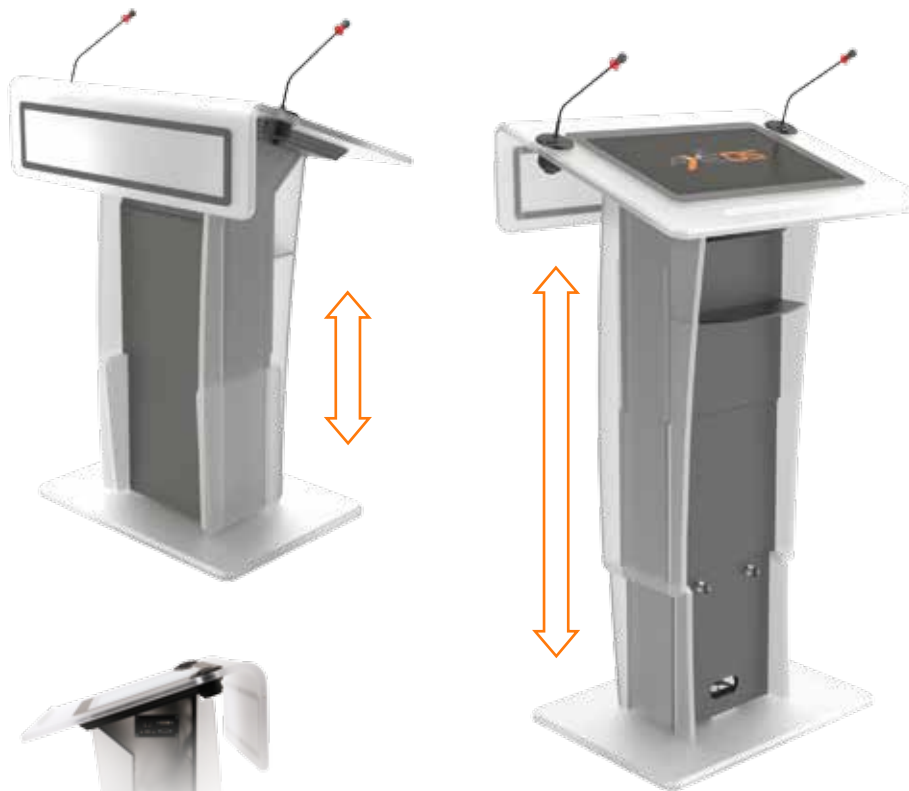

CHARACTERISTICS

- Possibility to combine the versions Neonyx Touch & Neonyx Lift: Neonyx Touch/Lift
- It includes all the characteristics of each version
- Weight: 40 kg

OPTIONS Available for all versions

- Without microphone base location
Ref: SM
- Anti-vibration microphone base
Ref: Sennheiser MZS31
- Microphone
Ref: upon request
- Logo adhesive
Ref: Logo/adh
- Logo printed
Ref: Logo/print
- Flight case
Ref: Flightcase

Connection panel

REFERENCE NEONYX TOUCH LIFT

➤ NEONYX_TOUCH_LIFT

➤ AXEOS - Siège social
Route des Dîgues
14123 Fleury-sur-Orne
France
Tél. : +33 (0)2 31 28 59 37

➤ Axeos - London Office
Phoenix Yard - 65 King's Cross Road
London, WC1X 9LW
United Kingdom
Tél. : +44 (0) 207 239 4965

www.axeos.net

